




**Item # 5305A, Gas and Diesel Series Pressure Washer**

Gas engine Drive; Oil-fired; Hot high pressure; Skid mount; Belt-driven tri-plex pump; 115 volt burner; Electric start; Black; Schedule 160 coil; 5.0 GPM/ 3000 PSI/ 18 HP Vanguard (electric); 960 pounds

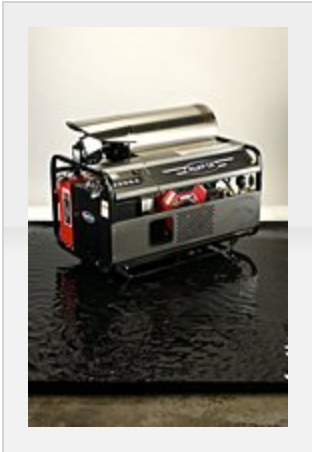

[Specifications](#) | [Manufacturing Notes](#)

Specifications	
<b>Flow Rate</b>	Wash: 5 gpm Steam: 2.5 gpm
<b>Pressure</b>	Steam: 250 psi Wash: 3000 psi
<b>Pump Style</b>	Ceramic Plungers Oil Bath Triplex
<b>Engine Type</b>	Vanguard Electric Start Belt Drive
<b>Engine Power</b>	18 hp
<b>Coil Construction Type</b>	Steel Pipe
<b>Coil Type</b>	Schedule 80
<b>Coil Inner Diameter</b>	1/2 in
<b>Coil Length</b>	158 ft

<b>Burner Type</b>	#1 Diesel Kerosene
<b>Burner Pressure Atomizing Temperature</b>	380000 Btu
<b>Burner Auto Ignition Voltage</b>	115 V
<b>Generator Voltage</b>	115 V
<b>Generator Power</b>	3000 W
<b>Fuel Consumption Capacity</b>	3.8 gal/h
<b>Fuel Tank Capacity</b>	10 gal
<b>Gas Tank Capacity</b>	6.5 gal
<b>Rising Temperature</b>	140 °F
<b>Chemical Features</b>	Precise Metered
<b>Float Tank Construction Material</b>	Stainless Steel
<b>Standard Parts/Features</b>	Temperature Control
<b>Length</b>	48 in
<b>Height</b>	46 in
<b>Width</b>	40 in
<b>Shipping Weight</b>	960 lb

Manufacturing Notes	—
<b>Manufacturing Notes</b>	<ul style="list-style-type: none"> <li>• For Capacity and Pressure: Gallonage and pressure may vary ±5% due to manufacturing tolerances in components.</li> <li>• Engine: Batteries not included.</li> <li>• Coil (Steel Pipe): ASTM A-53 steel pipe, spiral wound, cold water wrap design, removable. Wheel kits are optional.</li> <li>• All 12 volt burner units available with optional high limit control.</li> <li>• All models available ETL approved to UL1776 and CSA B140.11-M89 specifications.</li> <li>• Specifications subject to change without notice.</li> </ul>

--